


# ISONOE<sup>®</sup>

## 5-Band Program Equaliser

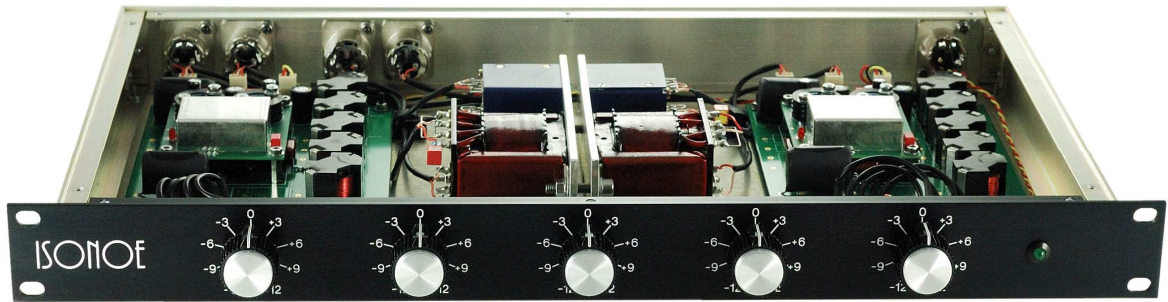

### Specification:

+/- 12dB Cut / Boost per band

50Hz / 275Hz / 1K / 4K5 / 12K5 Centre Frequencies with 1-octave bandwidth

Discrete Class A, Single-Ended Output Amplifiers

Transformer-Balanced Input and Output

Powered via Isonoe LRPS Power Supply

SN Ratio: Greater than 110dB

Frequency Response: 5Hz – 50KHz +/- 0.2dB

Wired by hand with silver-plated / PTFE-Insulated wire and Mogami OFC cable throughout

5-Year Guarantee on all Parts and Workmanship

